


High Voltage Resistor 高壓厚膜電阻器- RoHS

Dimension (mm)

The Dimension is available customers request

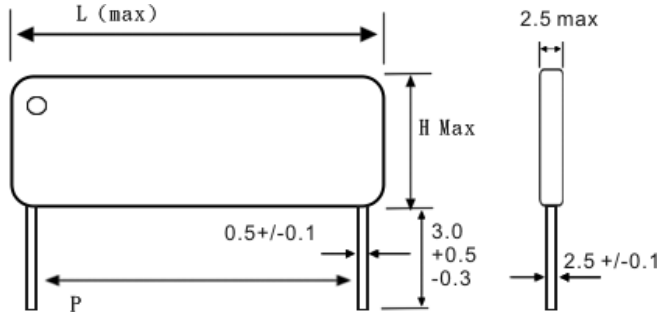

Coating Color- Black



Type	Dimensions (mm)		
	L. (Max)	H. (Max)	P.
HV1W2P8J	23.5	6.5	20.3±0.5
HV122P7J	21.0		17.8±0.5
HV122P5J	15.3	5.08	12.7±0.2
HV122P4J	12.7		10.2±0.2

How To Order

HV	1W	2P	8	J
High Voltage	Watt	Number of Pin	Pitch (inches)	Tolerance

- Specifications given herein may be changed at any time without prior notice, Please confirm technical specifications before your order/or use.

Rating


Type	Power Rating	Max Working Voltage	T.C.R. (°C)	Resistance Range(Ω)	Resistance Tolerance	Rated Ambient Temp.	Operating Temp. Range
HV1W2P8J	1W	10KV	±300ppm (°C)	10M~100M	J:±5%,K:±10%	±70°C	-25°C to 125°C
HV122P7J	0.5W			20M~200M			
HV122P5J				1M-20M	G: ±2%		
				2M-200M	J:±5%,K:±10%		
HV122P4J		1KV	2M-10M	F:±1%,G:±2%			

- The Max. Working voltage requested to applied as rating voltage when a calculated rated voltage exceeds it.
- Consult with us about the availability of resistors with resistance values and tolerances which are outside the ranges given above and of a special shape.


High Voltage Resistor 高壓厚膜電阻器- RoHS

Dimension (mm)

The Dimension is available customers request

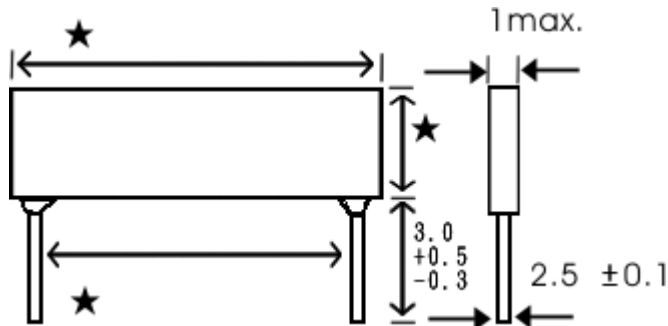

Coating Glass Coating Style

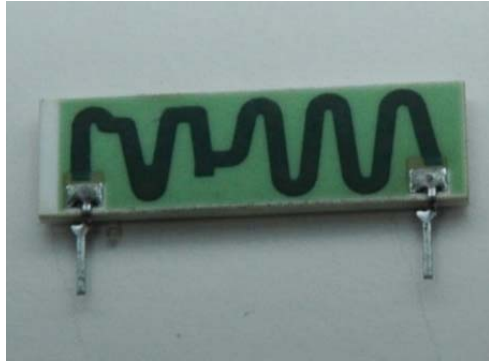

■: The marking “★” is for customers request.

- Specifications given herein may be changed at any time without prior notice, Please confirm technical specifications before your order/or use.

Rating

Type	Power Rating	Max Working Voltage	T.C.R. (°C)	Resistance Range(Ω)	Resistance Tolerance	Rated Ambient Temp.	Operating Temp. Range
Coating Glass	0.5W 1W 2W	10KV	+200ppm ±300ppm (°C)	1M ~ 1000M	J:±5%, K:±10% M:±20%	±70°C	-25°C to 125°C

- The Max. Working voltage requested to applied as rating voltage when a calculated rated voltage exceeds it.
- Consult with us about the availability of resistors with resistance values and tolerances which are outside the ranges given above and of a special shape.

MAYLOON